


EXCERIA PLUS G2 NVMe™ SSD

Unleash Your System

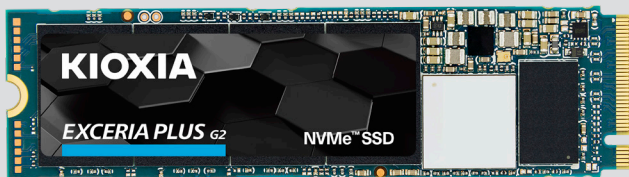

Capacity

500GB, 1TB, 2TB

Max Sequential Read/Write Speed¹

3,400/3,200 MB/s

Max Random Read/Write Speed²

500GB: 650,000/600,000 IOPS
1TB, 2TB: 680,000/620,000 IOPS

Features

BiCS FLASH™
NVMe™ 1.3c Technology
M.2 2280 Form Factor
PCIe® Gen3 x4 Lane
SSD Utility Management Software

Your high-performance gaming system needs high-performance storage. The KIOXIA EXCERIA PLUS G2 SSD series is built to deliver enthusiast-class PCIe® performance thanks to an 8-channel controller that brings out the full potential of its BiCS FLASH™ 3D flash memory. This new enthusiast-class SSD series offers up to 2 TB of capacity in a M.2 2280 form factor suitable for both desktops and mobile PCs.

Game-Changing Storage

Don't let your storage be outclassed. The KIOXIA EXCERIA PLUS G2 SSD series offer high performance storage for enthusiasts and hardcore gamers that feel held back by commodity storage hardware. With up to 3,400 MB/s sequential read speed¹ and 3,200 MB/s sequential write speed¹ available to you, your system won't be deprived of the storage bandwidth it needs to excel.



Game On!

Why keep using an interface that was designed for hard drives? Utilizing the latest NVMe™ 1.3c technology, the EXCERIA PLUS G2 SSD series reduces latency in your system's I/O path between your SSD and your CPU, resulting in smooth and responsive performance.

Small and Mighty

Featuring a thin and light M.2 2280 form factor, the EXCERIA PLUS G2 SSD series plugs directly into the motherboard, reducing additional cable clutter for a sleeker system.



Cutting Edge 3D Flash Memory

Each EXCERIA SSD is built with BiCS FLASH™ and a vertically stacked cell structure, delivering a cutting edge storage experience.

SSD Utility Management Software

The SSD Utility management software was designed to help your KIOXIA drive thrive and lets you be in control of maintenance, monitoring, SSD tuning and more!

We highly recommend you install and update to the latest version to maximize your drive's performance and check its Percentage Life Left using the health gauge.

Specifications

Physical

Capacity 500GB, 1TB, 2TB	Form Factor M.2 Type 2280-D3-M
Interface PCI Express® Base Specification Revision 3.1a (PCIe®)	Flash Memory Type BiCS FLASH™ TLC
Interface Maximum Speed 32 GT/s (PCIe® Gen3x4L)	Dimension (Max: LxWxH) 80.15 mm x 22.15 mm x 3.73 mm
Interface Command NVMe Express™ Revision 1.3c command set	Drive Weight 10.0 g (typ.)

Performance

Max Sequential Read Speed¹ 3,400 MB/s	Max Sequential Write Speed¹ 3,200 MB/s
Max Random Read Speed² 500GB: 650,000 IOPS 1TB, 2TB: 680,000 IOPS	Max Random Write Speed² 500GB: 600,000 IOPS 1TB, 2TB: 620,000 IOPS
Endurance: TBW (Total Bytes Written)³ 500GB: 200TB 1TB: 400TB 2TB: 800TB	MTTF 1.5 million hours

Environmental

Operating Temperature 0 °C (Ta) to 85 °C (Tc)	Storage Temperature -40 °C to 85 °C
Shock Resistance 9.806 km/s ² {1,000 G} 0.5 ms half sine wave	Vibration 196 m/s ² {20 G} Peak, 10~2000 Hz, (20 min / Axis) x 3 Axis
Supply Voltage 3.3 V ±5 %	Power Consumption (Active) 500GB: 6.7 W (typ.) 1TB: 6.7 W (typ.) 2TB: 7.6 W (typ.)
Power Consumption PS3: 50 mW (typ.) PS4: 5 mW (typ.)	

Compatibility

PCI Express

Compatible with PCI Express® Base Specification Revision 3.1a and NVMe Express™ Revision 1.3c command set

Connector Type

M.2 M key Socket

Target Applications

Client desktops and laptops

Additional Features

Services and Support

5-year manufacturer's warranty⁴

Performance Optimization

TRIM, Idle Time Garbage Collection

Ordering Information

Global Package:

500GB

PN: LRD20Z500GG8
EAN: 4582563852419

1TB

PN: LRD20Z001TG8
EAN: 4582563852426

2TB

PN: LRD20Z002TG8
EAN: 4582563852433

China Package:

500GB

PN: LRD20Z500GC8
EAN: 4582563852440

1TB

PN: LRD20Z001TC8
EAN: 4582563852457

2TB

PN: LRD20Z002TC8
EAN: 4582563852464

¹ EXCERIA PLUS G2 SSD: Sequential speeds are measured with CrystalDiskMark 6.0.2 x64, Q=32, T=1. These values are the best values obtained in a specific test environment at KIOXIA Corporation and KIOXIA Corporation warrant neither read nor write speeds in individual devices. Read and write speed may vary depending on a device used and file size read or written.

² EXCERIA PLUS G2 SSD: 4KiB random performance is measured with CrystalDiskMark 6.0.2 x64, Q=32, T=8. These values are the best values obtained in a specific test environment at KIOXIA Corporation and KIOXIA Corporation warrant neither read nor write speeds in individual devices. Read and write speed may vary depending on a device used and file size read or written.

³ EXCERIA PLUS G2 SSD: Definition and conditions of TBW (Terabytes Written) are based on JEDEC standard; JESD219A Solid-State Drive (SSD) Endurance Workloads, July 2012, and defined for the service life.

⁴ MANUFACTURER'S WARRANTY IS EFFECTIVE EITHER (I) FIVE (5) YEARS FROM THE DATE OF PURCHASE IN ITS ORIGINAL SEALED PACKAGING OR (II) FOR THE TIME PERIOD UNTIL THE "PERCENTAGE LIFE LEFT" WILL BE ZERO, WHICHEVER IS SHORTER. The "Percentage Life Left" can be found using "Health" gauge of the SSD Utility for KIOXIA products, which is available at personal.kioxia.com/support/.

PCIe, PCI Express and PCI-SIG are registered trademarks of PCI-SIG.

NVM Express, NVMe, NVMe-MI and NVMe-oF are trademarks of NVM Express, Inc.

All other company names, product names, and service names mentioned herein may be trademarks of their respective companies.

Definition of capacity: KIOXIA defines a megabyte (MB) as 1,000,000 bytes, a gigabyte (GB) as 1,000,000,000 bytes and a terabyte (TB) as 1,000,000,000,000 bytes. A computer operating system, however, reports storage capacity using powers of 2 for the definition of 1GB = 2³⁰ = 1,073,741,824 bytes and therefore shows less storage capacity. Available storage capacity (including examples of various media files) will vary based on file size, formatting, settings, software and operating system, such as Microsoft Operating System and/or pre-installed software applications, or media content. Actual formatted capacity may vary.

A kibibyte (KiB) means 2¹⁰, or 1,024 bytes, a mebibyte (MiB) means 2²⁰, or 1,048,576 bytes, and a gibibyte (GiB) means 2³⁰, or 1,073,741,824 bytes.

IOPS: Input Output Per Second (or the number of I/O operations per second)

MTTF (Mean Time to Failure) is not a guarantee or estimate of product life; it is a statistical value related to mean failure rates for a large number of products which may not accurately reflect actual operation. Actual operating life of the product may be different from the MTTF.

Read and write speed may vary depending on the host device, read and write conditions, and file size.

Subject to Change: While KIOXIA has made every effort at the time of publication to ensure the accuracy of the information provided herein, product specifications, configurations, prices, system/component/options availability are all subject to change without notice.

Product image may represent design model. Images for illustration purpose only. The product appearance may differ from the actual product. Actual number of flash components differs by drive capacity.